



rbixxTM
Light of Happiness...

product catalogue



4KV HPF DRIVER 440V PROTECTION

THINY DOWN LIGHT PANEL



Power	9W (OX-01)	15W (OX-02)	20W (OX-03)
Operating Voltage	100-300v AC	100-300v AC	100-300v AC
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV
High Voltage	440V AC	440V AC	440V AC
Power Factor	>0.99	>0.99	>0.99
Efficiency	>90%	>90%	>90%
CRI	>80	>80	>80
Dimensions	120mm Dia. x 35mm	150mm Dia. x 35mm	170mm Dia. x 35mm
Cut Out	92mm	128mm	145mm
Life Span	50000 Hours	50000 Hours	50000 Hours
LED Lumen	990 Lumen	1650 Lumen	2200 Lumen

CCT - 3000K, 4000K, 6500K AND 3 IN 1

SLIM LED PANEL (METAL)



Power	8W(OX-010)	15W (OX-011)	22W (OX-012)
Operating Voltage	100-300v AC	100-300v AC	100-300v AC
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV
High Voltage	440V AC	440V AC	440V AC
Power Factor	>0.99	>0.99	>0.99
Efficiency	>90%	>90%	>90%
CRI	>80	>80	>80
Dimensions	120mm Dia. x 35mm	175mm Dia. x 35mm	225mm Dia. x 35mm
Cut Out	100mm	150mm	200mm
Life Span	50000 Hours	50000 Hours	50000 Hours
LED Lumen	880 Lumen	1650 Lumen	2420 Lumen

CCT - 3000K, 4000K, 6500K

N - SERIES LED PANEL



Power	8W (OX-04)	16W (OX-05)
Operating Voltage	100-300v AC	100-300v AC
Surge Protection	Up to 4KV	Up to 4KV
High Voltage	440V AC	440V AC
Power Factor	>0.99	>0.99
Efficiency	>90%	>90%
CRI	>80	>80
Life Span	50000 Hours	50000 Hours
LED Lumen	880 Lumen	1760 Lumen

CCT - 3000K, 4000K, 6500K



4KV HPF DRIVER 440V PROTECTION



DEEP DOWN LIGHT LED PANEL (Metal)

Power	<u>12W (OX-015)</u>	<u>18W (OX-016)</u>
Operating Voltage	100-300v AC	100-300v AC
Surge Protection	Up to 4KV	Up to 4KV
High Voltage	440V AC	440V AC
Power Factor	>0.99	>0.99
Efficiency	>90%	>90%
CRI	>80	>80
Dimensions	120mm Dia. x 55mm	155mm Dia. x 55mm
Cut Out	115mm	145mm
Life Span	50000 Hours	50000 Hours
LED Lumen	1680 Lumen	2520 Lumen

CCT - 3000K, 4000K, 6500K



N - SERIES DEEP DOWN LED PANEL (PC)

Power	<u>08W (OX-013)</u>	<u>15W (OX-014)</u>	<u>22W (OX-017)</u>
Operating Voltage	100-300v AC	100-300v AC	100-300v AC
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV
High Voltage	440V AC	440V AC	440V AC
Power Factor	>0.99	>0.99	>0.99
Efficiency	>90%	>90%	>90%
CRI	>80	>80	>80
Dimensions	115mm Dia. x 51mm	152mm Dia. x 51mm	178mm Dia. x 51mm
Cut Out	102mm	140mm	165mm
Life Span	50000 Hours	50000 Hours	50000 Hours
LED Lumen	1120 Lumen	2100 Lumen	3080 Lumen

CCT - 3000K, 4000K, 6500K



WALL LIGHT

Power	<u>12W (OX-103)</u>	<u>20W (OX-104)</u>	<u>30W (OX-105)</u>
Operating Voltage	100-300v AC	100-300v AC	100-300v AC
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV
High Voltage	440V AC	440V AC	440V AC
Power Factor	>0.99	>0.99	>0.99
Efficiency	>90%	>90%	>90%
CRI	>80	>80	>80
Life Span	50000 Hours	50000 Hours	50000 Hours
LED Lumen	1320 Lumen	2200 Lumen	3300 Lumen

CCT - 3000K, 4000K, 6500K
WHITE BODY / BLACK BODY



4KV HPF DRIVER 440V PROTECTION

CYLINDER LIGHT (LENS)



Power	<u>7W (OX-094)</u>	<u>12W (OX-095)</u>	<u>18W (OX-096)</u>
Operating Voltage	100-300v AC	100-300v AC	100-300v AC
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV
High Voltage	440V AC	440V AC	440V AC
Power Factor	>0.99	>0.99	>0.99
Efficiency	>90%	>90%	>90%
CRI	>80	>80	>80
Life Span	50000 Hours	50000 Hours	50000 Hours
LED Lumen	770 Lumen	1680 Lumen	2520 Lumen

**CCT - 3000K, 4000K, 6500K
BLACK BODY / ROSE GOLD
WHITE BODY / ROSE GOLD**

CYLINDER LIGHT



Power	<u>7W (OX-097)</u>	<u>12W (OX-098)</u>
Operating Voltage	100-300v AC	100-300v AC
Surge Protection	Up to 4KV	Up to 4KV
High Voltage	440V AC	440V AC
Power Factor	>0.99	>0.99
Efficiency	>90%	>90%
CRI	>80	>80
Life Span	50000 Hours	50000 Hours
LED Lumen	770 Lumen	1680 Lumen

**CCT - 3000K, 4000K, 6500K
BLACK BODY / ROSE GOLD
WHITE BODY / ROSE GOLD**

TRACK LIGHT



Power	<u>12W (OX-089)</u>	<u>20W (OX-090)</u>	<u>30W (OX-091)</u>
Operating Voltage	100-300v AC	100-300v AC	100-300v AC
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV
High Voltage	440V AC	440V AC	440V AC
Power Factor	>0.99	>0.99	>0.99
Efficiency	>90%	>90%	>90%
CRI	>80	>80	>80
Life Span	50000 Hours	50000 Hours	50000 Hours
LED Lumen	1680 Lumen	2200 Lumen	3300 Lumen

**CCT - 3000K, 4000K, 6500K
WHITE BODY / BLACK BODY**



4KV HPF DRIVER 440V PROTECTION

BULKHEAD



Power	<u>10W (OX-018)</u>	<u>20W (OX-019)</u>
Operating Voltage	100-300v AC	100-300v AC
Surge Protection	Up to 4KV	Up to 4KV
High Voltage	440V AC	440V AC
Power Factor	> 0.99	> 0.99
Efficiency	> 90%	> 90%
CRI	> 80	> 80
Dimensions	165mm Dia. x 45mm	205mm Dia. x 60mm
Life Span	50000 Hours	50000 Hours
LED Lumen	1100 Lumen	2200 Lumen

CCT - 3000K, 6500K

THINY SURFACE LED PANEL



Power	<u>9W (OX-021)</u>	<u>15W (OX-022)</u>	<u>20W (OX-023)</u>
Operating Voltage	100-300v AC	100-300v AC	100-300v AC
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV
High Voltage	440V AC	440V AC	440V AC
Power Factor	> 0.99	> 0.99	> 0.99
Efficiency	> 90%	> 90%	> 90%
CRI	> 80	> 80	> 80
Dimensions	120mm Dia. x 35mm	145mm Dia. x 35mm	165mm Dia. x 35mm
Life Span	50000 Hours	50000 Hours	50000 Hours
LED Lumen	990 Lumen	1650 Lumen	2200 Lumen

CCT - 3000K, 4000K, 6500K AND 3 IN 1

FRAMELESS SURFACE LED PANEL (METAL)



Power	<u>16W (OX-029)</u>	<u>24W (OX-030)</u>	<u>36W (OX-031)</u>
Operating Voltage	100-300v AC	100-300v AC	100-300v AC
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV
High Voltage	440V AC	440V AC	440V AC
Power Factor	> 0.99	> 0.99	> 0.99
Efficiency	> 90%	> 90%	> 90%
CRI	> 80	> 80	> 80
Dimensions	120mm Dia. x 35mm	155mm Dia. x 35mm	225mm Dia. x 35mm
Life Span	50000 Hours	50000 Hours	50000 Hours
LED Lumen	1760 Lumen	2640 Lumen	3960 Lumen

CCT - 3000K, 4000K, 6500K



4KV HPF DRIVER 440V PROTECTION

PRIME COB LIGHT with REFLECTOR



Power	<u>7W (OX-045)</u>	<u>12W (OX-046)</u>
Operating Voltage	100-300v AC	100-300v AC
Surge Protection	Up to 4KV	Up to 4KV
High Voltage	440V AC	440V AC
Power Factor	>0.99	>0.99
Efficiency	>90%	>90%
CRI	>80	>80
Dimensions	60mm Dia. x 65mm	80mm Dia. x 85mm
Cut Out	55mm	75mm
Life Span	50000 Hours	50000 Hours
LED Lumen	770 Lumen	1320 Lumen

Rose Gold, Ase Grey, CCT - 3000K, 4000K, 6500K
Body: Black / White


COB DEEP LIGHT



Power	<u>7W (OX-034)</u>	<u>12W (OX-035)</u>	<u>18W (OX-036)</u>
Operating Voltage	100-300v AC	100-300v AC	100-300v AC
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV
High Voltage	440V AC	440V AC	440V AC
Power Factor	>0.99	>0.99	>0.99
Efficiency	>90%	>90%	>90%
CRI	>80	>80	>80
Dimensions	60mm	80mm Dia. x 85mm	95mm Dia. x 93mm
Cut Out	55mm	75mm	90mm
Life Span	50000 Hours	50000 Hours	50000 Hours
LED Lumen	770 Lumen	1320 Lumen	1980 Lumen

CCT - 3000K, 4000K, 6500K

COB LIGHT with REFLECTOR

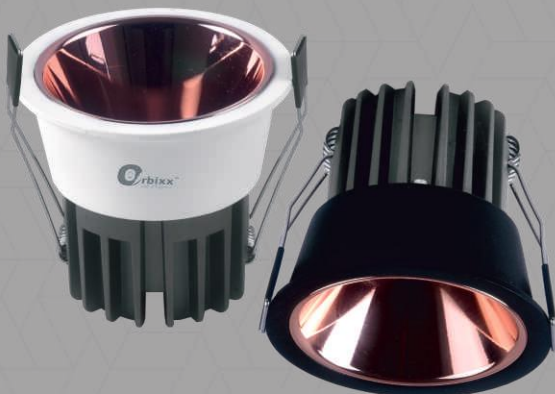

Power	<u>7W (OX-048)</u>	<u>12W (OX-049)</u>
Operating Voltage	100-300v AC	100-300v AC
Surge Protection	Up to 4KV	Up to 4KV
High Voltage	440V AC	440V AC
Power Factor	>0.99	>0.99
Efficiency	>90%	>90%
CRI	>80	>80
Dimensions	60mm Dia. x 65mm	80mm Dia. x 85mm
Cut Out	55mm	75mm
Life Span	50000 Hours	50000 Hours
LED Lumen	770 Lumen	1320 Lumen

Rose Gold, Ase Grey, CCT - 3000K, 4000K, 6500K
Body: Black / White

2.5 & 4 KV / 440V PROTECTION

MINI SURFACE (STRIKER) LED



Power	5W(OX-057)
Operating Voltage	100-300v AC
Surge Protection	Up to 4KV
High Voltage	440V AC
Power Factor	> 0.99
Dimensions	68mm Dia. x 16mm
Life Span	50000 Hours
LED Lumen	550 Lumen
CCT - WH/WW/BL/RD/GR/PK	

RIMLESS MINI SURFACE (STRIKER) LED



Power	5W (OX-060)
Operating Voltage	100-300v AC
Surge Protection	Up to 4KV
High Voltage	440V AC
Power Factor	> 0.99
Dimensions	63mm Dia. x 15mm
Life Span	50000 Hours
LED Lumen	550 Lumen
CCT - WH/WW/BL/RD/GR/PK/ 3IN1	

3W THINY JUNCTION LED



Power	3W (OX-065)
Operating Voltage	100-300v AC
Surge Protection	Up to 4KV
High Voltage	440V AC
Power Factor	> 0.99
Dimensions	78mm Dia. x 37mm
Cutout	47mm
Life Span	50000 Hours
LED Lumen	550 Lumen
CCT - WH/WW/BL/RD/GR/PK/ RD+BL+PK, WH+WW+NW	



4KV HPF DRIVER 440V PROTECTION

COB MOVABLE LIGHT



Power	7W (OX-040)	10W (OX-041)	15W (OX-042)	24W (OX-43)	36W (OX-44)
Operating Voltage	100-300v AC	100-300v AC	100-300v AC	100-300v AC	100-300v AC
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
High Voltage	440V AC	440V AC	440V AC	440V AC	440V AC
Power Factor	> 0.99	> 0.99	> 0.99	> 0.99	> 0.99
Efficiency	> 90%	> 90%	> 90%	> 90%	> 90%
CRI	> 80	> 80	> 80	> 80	> 80
Dimensions	90mm Dia. x 50mm	90mm Dia. x 50mm	110mm Dia. x 68mm	140mm Dia. x 80mm	160mm Dia. x 80mm
Cut Out	65mm	65mm	84mm	100mm	115mm
Life Span	50000 Hours	50000 Hours	50000 Hours	50000 Hours	50000 Hours
LED Lumen	770 Lumen	1100 Lumen	1650 Lumen	2640 Lumen	3960 Lumen

CCT - 3000K, 4000K, 6500K

TUBE LIGHT LED SERIES



Power	5W (OX-051)	10W (OX-052)	22W (OX-053)
Operating Voltage	100-300v AC	100-300v AC	100-300v AC
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV
High Voltage	440V AC	440V AC	440V AC
Power Factor	> 0.99	> 0.99	> 0.99
Dimensions	266mm Dia. x 37mm	536mm Dia. x 37mm	1135mm Dia. x 37mm
Life Span	50000 Hours	50000 Hours	50000 Hours
LED Lumen	550 Lumen	1100 Lumen	2440 Lumen

CCT - 3000K, 4000K, 6500K



4KV HPF DRIVER 440V PROTECTION

ALUMINUM BODY TUBE LIGHT

Power	40W (OX-054)	50w (OX-056)
Operating Voltage	100-300v AC	100-300v AC
Surge Protection	Up to 4KV	Up to 4KV
High Voltage	440V AC	440V AC
Power Factor	>0.99	>0.99
Dimensions	1990mm Dia. x 37mm	1990mm Dia. x 37mm
Life Span	50000 Hours	50000 Hours
LED Lumen	4400 Lumen	5500 Lumen

CCT - 3000K, 4000K, 6500K



COB CABINET LIGHT (BUTTON)



Power	3W (OX-069)
Operating Voltage	100-300v AC
Surge Protection	Up to 4KV
High Voltage	440V AC
Power Factor	>0.99
Dimensions	42mm Dia. x 16mm
Cut Out	34mm
Life Span	50000 Hours
LED Lumen	330 Lumen
CCT - WH/WW/BL/RD/GR/PK	

TRACK PATTI

Size : 1 mtr. & 2 mtr.

Body Color : White & Black






4KV HPF DRIVER 440V PROTECTION

7W JUNCTION LIGHT LED



Power	7W (OX-067)
Operating Voltage	100-300v AC
Surge Protection	Up to 4KV
High Voltage	440V AC
Power Factor	>0.99
Dimensions	108mm Dia. x 50mm
Cut Out	78mm
Life Span	50000 Hours
LED Lumen	770 Lumen
CCT - WH/WW/BL/RD/GR/PK/ 3 in 1	

FLOOD LIGHT GM MODEL

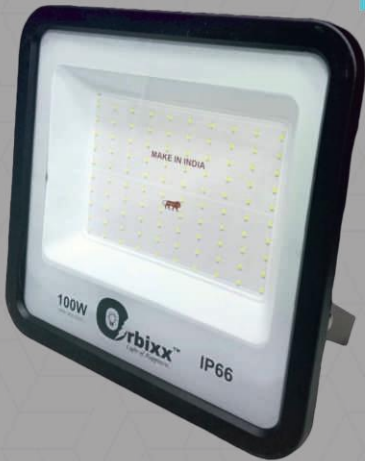

Power	50W (OX-076)	100W (OX-077)	200W (OX-078)
Operating Voltage	100-300v AC	100-300v AC	100-300v AC
Surge Protection	Up to 6KV	Up to 6KV	Up to 6KV
High Voltage	440V AC	440V AC	440V AC
Power Factor	>0.99	>0.99	>0.99
Dimensions	230x225x60mm	285x275x85mm	365x285x110mm
Life Span	50000 Hours	50000 Hours	50000 Hours
LED Lumen	5500 Lumen	11000 Lumen	22000 Lumen

Aluminum Die Cast + Isolated Driver

CCT - 3000K, 6500K

ALSO AVAILABLE IN 30w / 300w / 400w / 500w

FLOOD LIGHT LENS MODEL



Power	50W (OX-071)	100W (OX-072)	150W (OX-073)	200W (OX-074)
Operating Voltage	100-300v AC	100-300v AC	100-300v AC	100-300v AC
Surge Protection	Up to 6KV	Up to 6KV	Up to 6KV	Up to 6KV
High Voltage	440V AC	440V AC	440V AC	440V AC
Power Factor	>0.99	>0.99	>0.99	>0.99
CRI	>80	>80	>80	>80
Dimensions	200x195x40mm	240x235x40mm	285x295x55mm	315x295x55mm
Life Span	50000 Hours	50000 Hours	50000 Hours	50000 Hours
LED Lumen	5500 Lumen	11000 Lumen	16500 Lumen	22000 Lumen

Aluminum Die Cast + 6Kv - Isolated Driver

CCT - 3000K, 6500K



6KV HPF DRIVER 440V PROTECTION


STREET LIGHT LENS MODEL



Power	<u>24W (OX-081)</u>	<u>36W (OX-082)</u>	<u>50W (OX-083)</u>	<u>100W (OX-084)</u>
Operating Voltage	100-300v AC	100-300v AC	100-300v AC	100-300v AC
Surge Protection	Up to 6KV	Up to 6KV	Up to 6KV	Up to 6KV
High Voltage	440V AC	440V AC	440V AC	440V AC
Power Factor	>0.99	>0.99	>0.99	>0.99
Dimensions	300x103x46	340x124x47	391x145x50	450x170x56
Life Span	50000 Hours	50000 Hours	50000 Hours	50000 Hours
LED Lumen	2640 Lumen	3960 Lumen	5500 Lumen	11000 Lumen

Aluminum Die Cast + Isolated Driver
CCT - 3000K, 6500K


PC STREET LIGHT LENS MODEL

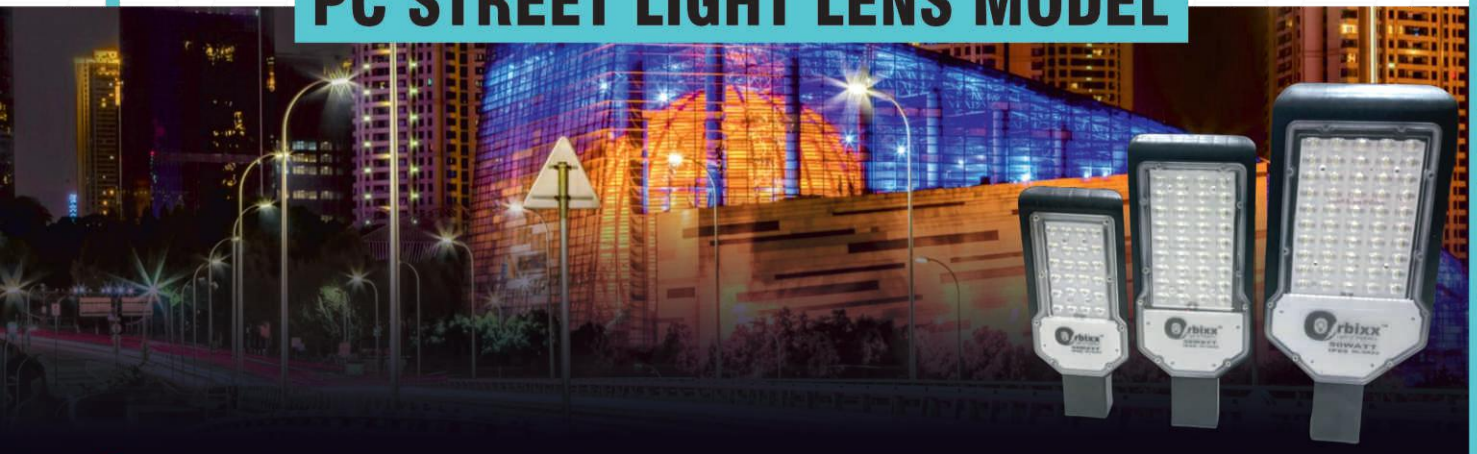

Power	<u>24W (OX-085)</u>	<u>36W (OX-086)</u>	<u>50W (OX-087)</u>
Operating Voltage	100-300v AC	100-300v AC	100-300v AC
Surge Protection	Up to 6KV	Up to 6KV	Up to 6KV
High Voltage	440V AC	440V AC	440V AC
Power Factor	>0.99	>0.99	>0.99
Dimensions	300x103x46	340x124x47	391x145x50
Life Span	50000 Hours	50000 Hours	50000 Hours
LED Lumen	2640 Lumen	3960 Lumen	5500 Lumen

PC Body + Isolated Driver
CCT - 3000K, 6500K

SMPS SLIM DRIVER

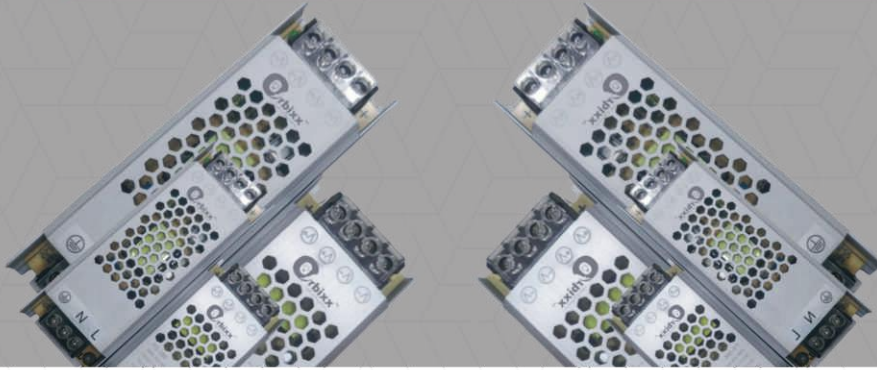


Power	5 AMP (OX-111)	10AMP (OX-112)	15AMP (OX-113)	20AMP (OX-114)	25AMP (OX-115)	30AMP (OX-116)
Input Voltage	170-240V	170-240V	170-240V	170-240V	170-240V	170-240V
Output Voltage	12V/5A	12V/10A	12V/15A	12V/20A	12V/25A	12V/30A
Power (Watts)	Max 60W	Max 120W	Max 180W	Max 240W	Max 300W	Max 360W
IP Rating	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20

TILTABLE COB LED LIGHT




Power	3W (OX-070)
Operating Voltage	100-300v AC
Surge Protection	Up to 4KV
High Voltage	440V AC
Power Factor	>0.99
Dimensions	70mm Dia. x 35mm
Cutout	55mm
Life Span	50000 Hours
LED Lumen	330 Lumen
CCT - WH/WW/BL/RD/GR/PK 3IN1	

PC FRAMELESS SURFACE LED PANEL

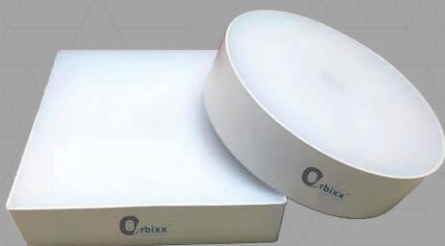

Power	8W (OX-032)	16W (OX-033)
Operating Voltage	100-300v AC	100-300v AC
Surge Protection	Up to 4KV	Up to 4KV
High Voltage	440V AC	440V AC
Power Factor	>0.99	>0.99
Dimensions	95mm Dia. x 95mm	145mm Dia. x 145mm
Cutout	95mm	145mm
Life Span	50000 Hours	50000 Hours
LED Lumen	720 Lumen	1350 Lumen
CCT - WH/WW/NW		

RIMLESS COLOUR PANEL

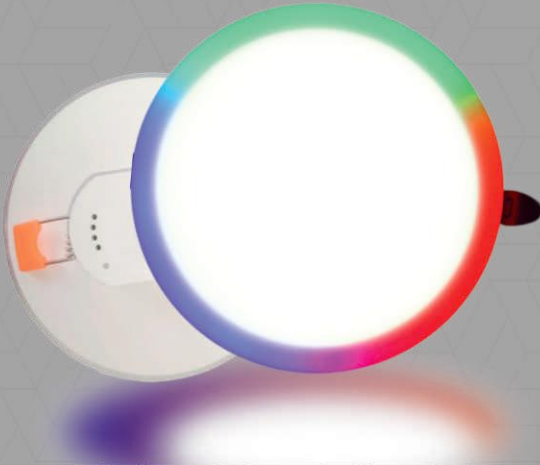

Power	<u>7+7W (OX-07)</u>	<u>12+12W (OX-08)</u>
Operating Voltage	100-300v AC	100-300v AC
Surge Protection	Up to 4KV	Up to 4KV
High Voltage	440V AC	440V AC
Power Factor	>0.99	>0.99
Dimensions	88mm Dia. x 47mm	125mm Dia. x 47mm
Cutout	47mm	47mm
Life Span	50000 Hours	50000 Hours
LED Lumen	770 Lumen	1320 Lumen

**CW+PGB | CW+BLUE | CW+PINK | CW+GREEN
CW+RED | CW+AMBER | CW+WW**

DEEP SPOT COB



Power	<u>3W (OX-079)</u>
Operating Voltage	100-300v AC
Surge Protection	Up to 4KV
High Voltage	440V AC
Power Factor	>0.99
Dimensions	30mm Dia. x 38mm
Cut Out	34mm
Life Span	50000 Hours
LED Lumen	330 Lumen
CCT - WH/WW/BL/RD/GR/PK	